

TESLA METER

(磁束密度計)

TM-901EXP

DISPLAY

- "REAL" and "PEAK HOLD" are displayed at the same time.
- A light can be tuned ON and OFF manually.




MESUREMENT RANGE : 0~3000.0mT




USB Type C

DETECT MODE

The magnetic flux density measurements range can be set by user and has a buzzing sound when in range.

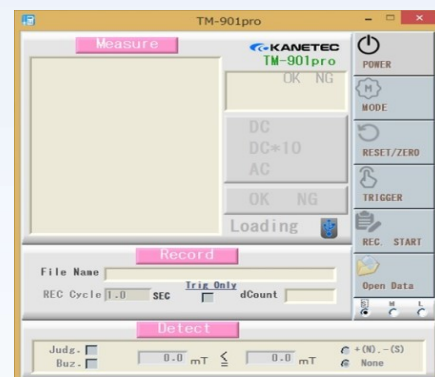

FREE Software

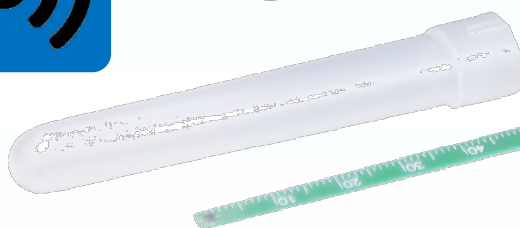

Flat grip



CE Marking

Features



Model	TM-901 EXP				Function	Zero reset	Polarity judgment
Object to detect	DC magnetic flux density		AC magnetic flux density			Max. detect value hold	Auto power off (Cancellable)
	Polarities (N, S)		40-500Hz				
Unit of measurement	mT/G both of two modes switchable				Output	Digital output (USB) / Analog output	
Measurement range	0~3000.0mT				Indication	Detected value	Digital
Measurement mode	Measurement mode	Measuring range	Resolution	Indication accuracy	Operating temperature	Polarity	Alphabets (N/S)
	DC×1※	0~200.0mT	0.1mT	±(5% of rdg.+ 3digit)		0 ~ +40℃ (104° F)	
Measuring range		200.1~3000.0mT	1mT	±(5% of rdg.+10digit)	Power source	Battery:Size AA(1.5 V) X 4 pieces External power source 5 - 6 VDC(USB feed)	
Resolution	DC×10	0~300.00mT	0.01mT	±(3% of rdg.+ 5digit)	Dimensions	143mm(5.62in) high×64mm(2.51in) wide×36mm(1.41in) thick	
Indication accuracy	AC※	0~150.00mT	0.01mT	±(5% of rdg.+20digit)	Mass	Approx. 290g(0.63lb) (batteries & probe included)	
		150.1~300.0mT	0.1mT		Accessories	Probe(TM-901PRB), Batteries, Carrying case	
		301.0~1500.00mT	1mT		Optional	Axial probe (TM-901AXL) Reference magnetic field (TM-SMF、TM-AMF)	

*The measuring range is automatically selected.

Note: This meter is not designed for measurement of electromagnetic waves.

Option / Accessories

Model TM MEASUREMENT PROBE FOR TESLA METER

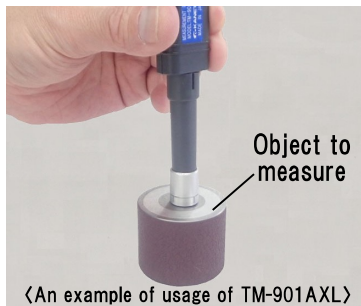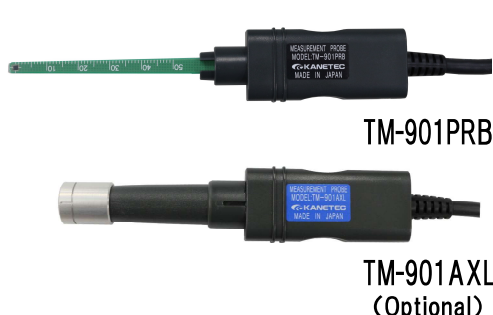

[Application]

A measurement probe for TM-901.

[Features]

Please keep this probe as a spare.

It can be replaced without troublesome calibration. In addition to the standard PRB (transverse type), an axial type (AXL) capable of vertical measurement and having high durability is optionally available.

Model	Applicable Model	Tip Dimensions	Cord Length	Mass
TM-901PRB	Only for TM-901※	(T)1.0(0.03) × (W)3.5(0.13) × (L)65(2.55)	1000 (39.4)	50g/0.11lb (Including probe cap)
TM-901AXL		φ13(0.51) × 55(2.16)		

※Can be used with Kanetec's conventional models TM-501, TM-601, TM-701 and TM-801.

Model TM-SMF/TM-AMF REFERENCE MAGNETIC FIELD FOR TESLA METER



[For standard probe]

Applicable probe:
TM-201
and later models


TM-SMF-050

Model	Magnetic Flux Density ※	Dimensions		Mass
		Dia.	Height	
TM-SMF-003	0.003T(30G)	φ 43(1.69)	50(1.96)	Approx. 0.5kg/1.10lb
TM-SMF-050	0.05T(500G)		40(1.57)	Approx. 0.4kg/0.88lb
TM-SMF-300	0.3T(3000G)		30(1.18)	Approx. 0.3kg/0.66lb
TM-SMF-1000	1T(10000G)	φ 73(2.87)	74(2.91)	Approx. 2.0kg/4.40lb

※The magnetic flux density is a nominal value. The measurement sheet included with the product shows the actual measured value of the product.

[Application]

- Daily check of the Tesla meter.
- When a calibration certificate of the reference magnetic field is obtained, the calibration of the Tesla Meter becomes economical.



[For axial type probe]

Applicable probe:
TM-601 AXL,
and later models

TM-AMF-300

Model	Magnetic Flux Density ※	Dimensions		Mass
		Dia.	Height	
TM-AMF-003	0.003T(30G)	φ 70(2.75)	60(2.36)	Approx. 1.4kg/3.08lb
TM-AMF-050	0.05T(500G)		55(2.16)	Approx. 1.3kg/2.86lb
TM-AMF-300	0.3T(3000G)		50(1.96)	Approx. 1.2kg/2.64lb

※The magnetic flux density is a nominal value. The measurement sheet included with the product shows the actual measured value of the product.

[Features]

- The closed circuit construction employing a permanent magnet that causes less magnetic force leak is employed.
- Small and light weight.

KANETEC CO., LTD.

INTERNATIONAL DEPARTMENT

No. 2-9, 3-chome, Iwamoto-cho, Chiyoda-ku Tokyo 101-0032 Japan

TEL : +81-3-5823-7013

FAX : +81-3-5823-7018

Home page address: <http://www.kanetec.co.jp/>

E-mail address: kokusai_01@kanetec.co.jp

KANETEC U.S.A. CORP.

140 W, Devon Avenue, Bensenville, IL 60106, U.S.A.

TEL: 630-860-1545, 860-2230

FAX: 630-860-9443

Home page address: <https://kanetec.com/>

E-mail address: Kanetec@kanetec.com

The products marked by ® are the registered trademarks of Kanetec Co., Ltd. in Japan.

The products listed in this catalog are subject to change in models, appearance and specifications without notice.

